




Double Sided Fireplace

- VFDS 800/1000 -

Click here to visit website: chad-o-chef/double-sided

A Shared Experience. This innovative, flueless gas fireplace creates a unique ambiance, heating two adjacent rooms simultaneously.

The Double Sided fireplace is available in two sizes, and multiple finish options. Its sleek design fits seamlessly between dividing walls, making it perfect for open-plan living spaces.

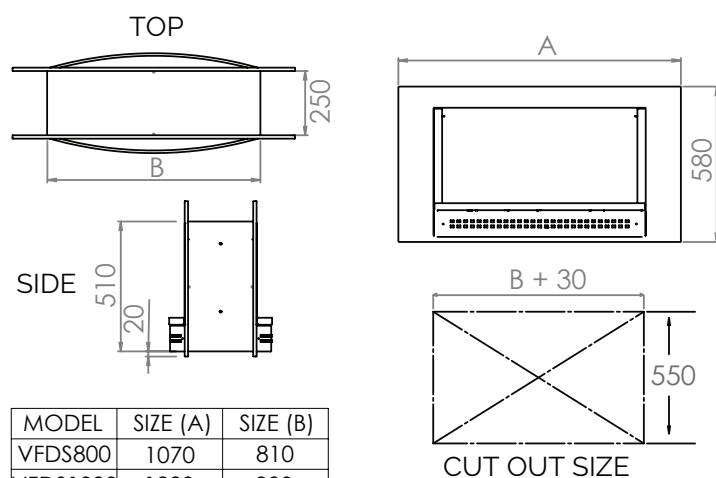

SAFETY, STYLE & QUALITY THAT LASTS

CHAD-O-CHEF
Lifestyle products

Since 1983



Double Sided Fireplace

- VFDS 800/1000 -



SPECIFICATIONS

Model	VFDS800	VFDS1000
Gas type	LPG or NG	LPG or NG
Operating pressure	2,8 kPa	2,8 kPa
Min. Regulator size	2 kg/hr	2 kg/hr
Gas consumption (Max.)	0.64 kg/hr	0.75 kg/hr
mJ input (Max.)	32 mJ/hr	37.5 mJ/hr
kW input (Max.)	8.7 kWh	10.2 kWh
Gas inlet connection	Ø8mm comp.	Ø8mm comp.
Ignition	Piezo Spark	Piezo Spark
Oxygen Depletion		
System (ODS)	min 18.5% O ₂	min 18.5% O ₂
*Min. Room size (Without ventilation)	160m ³	187.5m ³
*Max. Room size	399m ³ (108m ²)	416m ³ (131m ²)
Standard Burner Finish	Black Ceramic Ash	

FIREPLACE FINISHES

Stainless Frame



Black Frame



BURNER FINISHES


Black Ceramic Ash



Black Ceramic Coals



Aztec Gold Glass




Azure Blue Glass



Crystal Clear Glass



Diamond Black Glass



INSTALLATION INSTRUCTIONS

The Double Sided Fireplace is designed to fit through a cut out in a Double brick wall, and has clearance for +-10mm of screeding on either side of the wall.

The aperture in the wall needs the support of two load bearing lintels above the Double sided fireplace, before it can be installed.

These Fireplaces must be installed by a certified gas installer.

**Rooms smaller than the 'Min. Room size' will require suitable permanent ventilation.*

**'Max. Room sizes' are suggested and may vary according to room conditions.*



CHAD-O ENGINEERING
011 668 1910/1 | info@chad-o-chef.co.za
www.chad-o-chef.co.za

